


NOTICE OF PROPRIETARY RIGHTS: THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO Somefly technology Co.,Ltd.
IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED
IN WRITING BY Somefly technology Co.,Ltd.

RoHS compliant

SYM	REVISION	DESCRIPTION	DFTM	DATE	APPD	APPD

ATTENUATION	Part No.
0dB	240-2500N-00
3dB	240-2500N-03
6dB	240-2500N-06
10dB	240-2500N-10
20dB	240-2500N-20

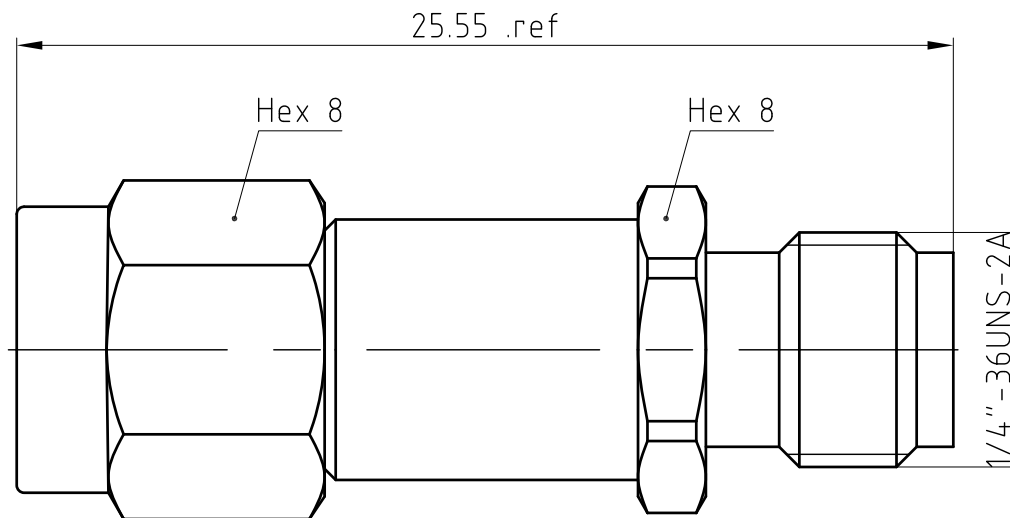

NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS, GOLD PLATING
INNER CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE

3. MECHANICAL:
A. DURABILITY: 100 CYCLES MIN.
B. TEMPERATURE RANGE: -40°C TO +85°C
C. COMPATIBLE WITH ALL STANDARD: IEC61169-15

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 18 GHz
C. VSWR: 1.3 MAX. @ DC - 18 GHz
D. ATTENUATION ACCURACY
00dB-----±1.0dB
03dB-----±1.0dB
06dB-----±1.0dB
10dB-----±1.0dB
20dB-----±1.0dB
E. INPUT POWER: 0.5 WATTS AVG @ 25°C

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

MATERIAL:	UNLESS OTHERWISE SPECIFIED		DFTM: 006		Somefly technology Co.,Ltd				
	ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6RMS MAX. REMOVE ALL BURRS 0.15x45°MAX. BREAK MACHINE CORNERS 0.15x45°D MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.2 .XX ±0.1 ANGLES: ±2° FRACTIONS: ±N/A		DATE: 2021.03.03						
	USED ON:		CHKD HeTong		SMA Male to SMA Female Fixed Attenuator 18GHz, 0.5W, XdB SMA-JK-0.5W-18G-XXdB				
SCALE: 5/1 DWG SIZE: A4		DATE: 2021.03.03							
DO NOT SCALE DRAWING		SURFACE (mm ²): xx WEIGHT (g): xx		DATE: 2021.03.03		SHT	240-2500N-XX	REV	A.0