


NOTICE OF PROPRIETARY RIGHTS: THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO Somefly technology Co.,Ltd.
IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED
IN WRITING BY Somefly technology Co.,Ltd.

RoHS compliant

SYM	REVISION	DESCRIPTION	DFTM	DATE	APPD	APPD

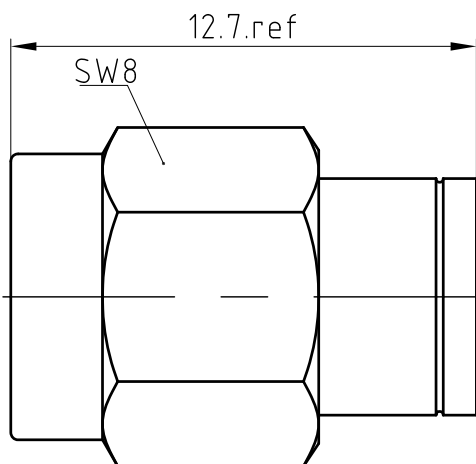

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

- NOTES:
- MATERIALS AND FINISHES:
BODY - STAINLESS STEEL, PASSIVATED
OUTER CONTACT - STAINLESS STEEL, PASSIVATED
INNER CONTACT - BERYLLIUM, GOLD PLATING
INSULATOR - PEI
 - ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 40 GHz
C. VSWR: 1.3
D. MAX POWER: 2WATT(CW) DERATED LINEARLY TO 0 W +125°C

- MECHANICAL:
A. DURABILITY: 100 CYCLES MIN.
B. TEMPERATURE RANGE: -40°C TO +125°C
C. COMPATIBLE WITH ALL STANDARD: MIL STD 348
- PACKAGING:
A. QUANTITY: PACK 1PCS
B. MARKING: TRAY TO BE MARKED ""

MATERIAL:	UNLESS OTHERWISE SPECIFIED		DFTM: 006		Somefly technology Co.,Ltd						
	ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6RMS MAX. REMOVE ALL BURRS 0.15x45° MAX. BREAK MACHINE CORNERS 0.15x45° MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.2 .XX ±0.1 ANGLES: ±2° FRACTIONS: ±N/A		DATE: 2021.09.10								
			USED ON:		CHKD HeTong		2.92 Male Termination 40G 2W				
SCALE: 5/1		DWTG SIZE A4		DATE: 2021.09.10		APPD: Stone					
DO NOT SCALE DRAWING		SURFACE (mm²) XX		WEIGHT (g) XX		SHT		063-K1001-CS		REV A.0	

1

2

3

4

5

6